




## JMD-15 Mill/Drill With NEWALL DP700 DRO

## **Product Images**



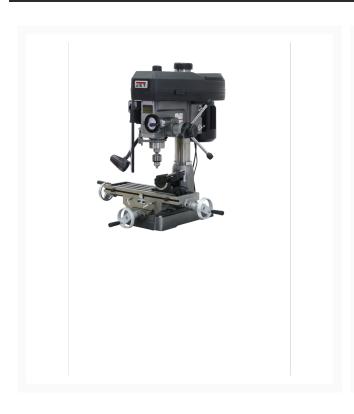

## **Short Description**

JMD-15 Mill/Drill With NEWALL DP700 DRO

## **Additional Information**

Base Dimensions (In.)       12/1/2 x 19-3/4         Column Diameter (In.)       3-5/8         Drilling Capacity (In.)       1         Max Distance Spindle to Table (In.)       14-1/2         Model Number       JMD-15         Motor (HP)       1 HP, 115/230V, 1Ph         Number of Spindle Speeds       12         Overall Dimensions (L x W x H) (In.)       38 x 37-1/2 x 42         Prop 65       Cancer and Reproductive Harm         Quill Diameter (In.)       2-7/16         Range of Spindle Speeds (RPM)       110 - 2,580         Spindle Taper (In. x TPI)       R-8         Spindle Travel (In.)       3-1/2         Swing (In.)       14-1/2         T-Slot Centers (In.)       1-13/16         T-Slots Number and Size (In.)       4 and 9/16         Table Longitudinal Travel (In.)       14         Table Size (L x W) (In.)       7-1/2 x 23         Weight (Lbs.)       440         Work Table Weight Capacity (Lbs.)       350	Stock Number	JT9-350125
Drilling Capacity (In.)       1         Max Distance Spindle to Table (In.)       14-1/2         Model Number       JMD-15         Motor (HP)       1 HP, 115/230V, 1Ph         Number of Spindle Speeds       12         Overall Dimensions (L x W x H) (In.)       38 x 37-1/2 x 42         Prop 65       Cancer and Reproductive Harm         Quill Diameter (In.)       2-7/16         Range of Spindle Speeds (RPM)       110 - 2,580         Spindle Taper (In. x TPI)       R-8         Spindle Travel (In.)       3-1/2         Swing (In.)       14-1/2         T-Slot Centers (In.)       1-13/16         T-Slots Number and Size (In.)       4 and 9/16         Table Longitudinal Travel (In.)       14         Table Size (L x W) (In.)       7-1/2 x 23         Weight (Lbs.)       440	Base Dimensions (In.)	12/1/2 x 19-3/4
Max Distance Spindle to Table (In.)  Model Number  JMD-15  Motor (HP)  1 HP, 115/230V, 1Ph  Number of Spindle Speeds  12  Overall Dimensions (L x W x H) (In.)  Prop 65  Cancer and Reproductive Harm  Quill Diameter (In.)  Range of Spindle Speeds (RPM)  Spindle Taper (In. x TPI)  Spindle Travel (In.)  3-1/2  Swing (In.)  1-13/16  T-Slots Number and Size (In.)  Table Longitudinal Travel (In.)  T-1/2 x 23  Weight (Lbs.)	Column Diameter (In.)	3-5/8
Model NumberJMD-15Motor (HP)1 HP, 115/230V, 1PhNumber of Spindle Speeds12Overall Dimensions (L x W x H) (In.)38 x 37-1/2 x 42Prop 65Cancer and Reproductive HarmQuill Diameter (In.)2-7/16Range of Spindle Speeds (RPM)110 - 2,580Spindle Taper (In. x TPI)R-8Spindle Travel (In.)3-1/2Swing (In.)14-1/2T-Slot Centers (In.)1-13/16T-Slots Number and Size (In.)4 and 9/16Table Longitudinal Travel (In.)14Table Size (L x W) (In.)7-1/2 x 23Weight (Lbs.)440	Drilling Capacity (In.)	1
Motor (HP)  1 HP, 115/230V, 1Ph  Number of Spindle Speeds  12  Overall Dimensions (L x W x H) (In.)  Prop 65  Cancer and Reproductive Harm  Quill Diameter (In.)  Range of Spindle Speeds (RPM)  110 - 2,580  Spindle Taper (In. x TPI)  R-8  Spindle Travel (In.)  3-1/2  Swing (In.)  1-13/16  T-Slot Centers (In.)  1-13/16  T-Slots Number and Size (In.)  4 and 9/16  Table Longitudinal Travel (In.)  14  Table Size (L x W) (In.)  7-1/2 x 23  Weight (Lbs.)	Max Distance Spindle to Table (In.)	14-1/2
Number of Spindle Speeds  12  Overall Dimensions (L x W x H) (In.)  38 x 37-1/2 x 42  Prop 65  Cancer and Reproductive Harm  Quill Diameter (In.)  Range of Spindle Speeds (RPM)  110 - 2,580  Spindle Taper (In. x TPI)  R-8  Spindle Travel (In.)  3-1/2  Swing (In.)  14-1/2  T-Slot Centers (In.)  1-13/16  T-Slots Number and Size (In.)  4 and 9/16  Table Longitudinal Travel (In.)  14  Table Size (L x W) (In.)  7-1/2 x 23  Weight (Lbs.)	Model Number	JMD-15
Overall Dimensions (L x W x H) (In.)  Prop 65  Cancer and Reproductive Harm  Quill Diameter (In.)  Range of Spindle Speeds (RPM)  110 - 2,580  Spindle Taper (In. x TPI)  R-8  Spindle Travel (In.)  3-1/2  Swing (In.)  1-13/16  T-Slot Centers (In.)  1-13/16  Table Longitudinal Travel (In.)  14  Table Size (L x W) (In.)  7-1/2 x 23  Weight (Lbs.)	Motor (HP)	1 HP, 115/230V, 1Ph
Prop 65  Cancer and Reproductive Harm  Quill Diameter (In.)  Range of Spindle Speeds (RPM)  Spindle Taper (In. x TPI)  R-8  Spindle Travel (In.)  3-1/2  Swing (In.)  14-1/2  T-Slot Centers (In.)  T-Slots Number and Size (In.)  Table Longitudinal Travel (In.)  T-1/2 x 23  Weight (Lbs.)	Number of Spindle Speeds	12
Quill Diameter (In.)       2-7/16         Range of Spindle Speeds (RPM)       110 - 2,580         Spindle Taper (In. x TPI)       R-8         Spindle Travel (In.)       3-1/2         Swing (In.)       14-1/2         T-Slot Centers (In.)       1-13/16         T-Slots Number and Size (In.)       4 and 9/16         Table Longitudinal Travel (In.)       14         Table Size (L x W) (In.)       7-1/2 x 23         Weight (Lbs.)       440	Overall Dimensions (L x W x H) (In.)	38 x 37-1/2 x 42
Range of Spindle Speeds (RPM)  Spindle Taper (In. x TPI)  R-8  Spindle Travel (In.)  3-1/2  Swing (In.)  14-1/2  T-Slot Centers (In.)  T-Slots Number and Size (In.)  Table Longitudinal Travel (In.)  Table Size (L x W) (In.)  T-1/2 x 23  Weight (Lbs.)	Prop 65	Cancer and Reproductive Harm
Spindle Taper (In. x TPI)       R-8         Spindle Travel (In.)       3-1/2         Swing (In.)       14-1/2         T-Slot Centers (In.)       1-13/16         T-Slots Number and Size (In.)       4 and 9/16         Table Longitudinal Travel (In.)       14         Table Size (L x W) (In.)       7-1/2 x 23         Weight (Lbs.)       440	Quill Diameter (In.)	2-7/16
Spindle Travel (In.)       3-1/2         Swing (In.)       14-1/2         T-Slot Centers (In.)       1-13/16         T-Slots Number and Size (In.)       4 and 9/16         Table Longitudinal Travel (In.)       14         Table Size (L x W) (In.)       7-1/2 x 23         Weight (Lbs.)       440	Range of Spindle Speeds (RPM)	110 - 2,580
Swing (In.)       14-1/2         T-Slot Centers (In.)       1-13/16         T-Slots Number and Size (In.)       4 and 9/16         Table Longitudinal Travel (In.)       14         Table Size (L x W) (In.)       7-1/2 x 23         Weight (Lbs.)       440	Spindle Taper (In. x TPI)	R-8
T-Slot Centers (In.)  1-13/16  T-Slots Number and Size (In.)  4 and 9/16  Table Longitudinal Travel (In.)  14  Table Size (L x W) (In.)  7-1/2 x 23  Weight (Lbs.)	Spindle Travel (In.)	3-1/2
T-Slots Number and Size (In.) 4 and 9/16  Table Longitudinal Travel (In.) 14  Table Size (L x W) (In.) 7-1/2 x 23  Weight (Lbs.) 440	Swing (In.)	14-1/2
Table Longitudinal Travel (In.)  Table Size (L x W) (In.)  7-1/2 x 23  Weight (Lbs.)  440	T-Slot Centers (In.)	1-13/16
Table Size (L x W) (In.) 7-1/2 x 23 Weight (Lbs.) 440	T-Slots Number and Size (In.)	4 and 9/16
Weight (Lbs.) 440	Table Longitudinal Travel (In.)	14
	Table Size (L x W) (In.)	7-1/2 x 23
Work Table Weight Capacity (Lbs.) 350	Weight (Lbs.)	440
	Work Table Weight Capacity (Lbs.)	350

